

SMC Networks

Welcome admin, [Logout](#)

Setup | Advanced | Management | Status | Help

Setup

Wizard

Internet Setup

Wireless

Local Network

Time and Date

Logout

INTERNET SETUP

Choose "Add", "Edit", or "Delete" to configure WAN interfaces.

WAN SETUP

VPI/VCI	VLAN ID	ENCAP	Service Name	Protocol	State	Status	Default Gateway	Action
<input type="checkbox"/>	08/81	0	LLC	pppoe_08_81_0_1	PPPoE	1	Connected	<input checked="" type="checkbox"/> Disconnect

Add Edit Delete

Waiting for http://192.168.2.1/cgi-bin/webproc...

Internet | Protected Mode: Off

8:31 PM 11/1/2011

VPI: 8 (0-255)

VCI: 81 (32-65535)

Service Category: UBR With PCR

Peak Cell Rate: 0 (cells/s)

Sustainable Cell Rate: 0 (cells/s)

Maximum Burst Size: 0 (cells/s)

TYPE

Protocol: PPP over Ethernet (PPPoE)

Encapsulation Mode: LLC

802.1Q VLAN ID: 0 (0=disable, 1 - 4094)

IE AND PASSWORD

PPP Username: 3770790

PPP Password: \*\*\*\*\*

Confirm PPP Password: \*\*\*\*\*

Authentication Method: Auto

Dial-up mode: AlwaysOn

Inactivity Timeout: 60 (Seconds [0-65535])

MTU: 1500 (128~1540)

Keep Alive:

Use Static IP Address:

IP Address:

DRESS TRANSLATION SETTINGS

Enable NAT:

Enable WAN Service:

Service Category: pppoe\_08\_81\_0\_0

Apply Cancel

SMC Networks

Welcome admin, [Logout](#)

Setup | Advanced | Management | Status | Help

Setup

Wizard

Internet Setup

Wireless

Local Network

Time and Date

Logout

INTERNET SETUP

This screen allows you to configure an ATM PVC identifier (VPI and VCI) and select a service category.

ATM PVC CONFIGURATION

VPI: 08 (0-255)

VCI: 81 (32-65535)

Service Category: UBR With PCR

Peak Cell Rate: 0 (cells/s)

Sustainable Cell Rate: 0 (cells/s)

Maximum Burst Size: 0 (cells/s)

CONNECTION TYPE

Protocol: PPP over Ethernet (PPPoE)

Encapsulation Mode: LLC

802.1Q VLAN ID: 0 (0=disable, 1 - 4094)

PPP USERNAME AND PASSWORD

PPP Username: 3770790

PPP Password: \*\*\*\*\*

Confirm PPP Password: \*\*\*\*\*

Authentication Method: Auto

Dial-up mode: AlwaysOn

Inactivity Timeout: 60 (Seconds [0-65535])

MTU: 1500 (128~1540)

Keep Alive:

Use Static IP Address:

IP Address:

NETWORK ADDRESS TRANSLATION SETTINGS

Enable NAT:

Enable WAN Service:

Service Category: pppoe\_08\_81\_0\_0

Apply Cancel

Internet | Protected Mode: Off

75% 8:34 PM 11/1/2011

تنظیمات اینترنت را مطابق شکل بعدی انجام دهید و در ادامه به تنظیمات IPMEDIA بپردازید.

با زدن add وارد تنظیمات اینترنت شده و مراحل را دنبال نمایید. در صورت داشتن این تنظیمات، به انجام تنظیمات IPMEDIA بپردازید.

VPI : 2 (0-255)  
 VCI : 80 (32-65535)  
 Service Category : UBR With PCR  
 Peak Cell Rate : 0 (cells/s)  
 Sustainable Cell Rate : 0 (cells/s)  
 Maximum Burst Size : 0 (cells/s)

**INTERNET TYPE**  
 Protocol : MAC Encapsulation Routing (MER)  
 Encapsulation Mode : LLC  
 802.1Q VLAN ID : 0 (0=disable, 1 - 4094)

**SETTINGS**  
 Obtain an IP address automatically  
 Use the following IP address :  
 IP Address :  
 WAN Subnet Mask :  
 Default gateway :  
 Obtain DNS server addresses automatically  
 Use the following DNS server addresses :  
 Preferred DNS server :  
 Alternate DNS server :

**ADDRESS TRANSLATION SETTINGS**  
 Enable NAT :   
 Enable WAN Service :   
 Service Category : mer\_2\_80\_0\_1

SMC NETWORKS  
 Setup | Advanced | Management | Status | Help  
**INTERNET SETUP**  
 This screen allows you to configure an ATM PVC identifier (VPI and VCI) and select a service category.  
**ATM PVC CONFIGURATION**  
 VPI : 2 (0-255)  
 VCI : 80 (32-65535)  
 Service Category : UBR With PCR  
 Peak Cell Rate : 0 (cells/s)  
 Sustainable Cell Rate : 0 (cells/s)  
 Maximum Burst Size : 0 (cells/s)  
**CONNECTION TYPE**  
 Protocol : MAC Encapsulation Routing (MER)  
 Encapsulation Mode : LLC  
 802.1Q VLAN ID : 0 (0=disable, 1 - 4094)  
**WAN IP SETTINGS**  
 Obtain an IP address automatically  
 Use the following IP address :  
 IP Address :  
 WAN Subnet Mask :  
 Default gateway :  
 Obtain DNS server addresses automatically  
 Use the following DNS server addresses :  
 Preferred DNS server :  
 Alternate DNS server :  
**NETWORK ADDRESS TRANSLATION SETTINGS**  
 Enable NAT :   
 Enable WAN Service :   
 Service Category : mer\_2\_80\_0\_1  
 Apply Cancel

SMC - Windows Internet Explorer  
 http://192.168.2.1/cgi-bin/webproc?getpage=html/index.html&errorpage=html/index.html&var:language=en\_us&var:m

SMC NETWORKS  
 Setup | Advanced | Management | Status | Help  
**INTERNET SETUP**  
 Choose "Add", "Edit", or "Delete" to configure WAN interfaces.

VPI/VCI	VLAN ID	ENCAP	Service Name	Protocol	State	Status	Default Gateway	Action
08/81	0	LLC	ppoe_08_81_0_1	PPPoE	1	Connected	<input checked="" type="checkbox"/>	Disconnect
2/80	0	LLC	mer_2_80_0_1	DHCP	1	Connected	<input type="checkbox"/>	


Add Edit Delete

بعد از اتمام مراحل باید در جدول دو ردیف داشته باشیم یکی برای اینترنت و دیگری برای ipmedia



SMC - Windows Internet Explorer  
 http://192.168.2.1/cgi-bin/webproc?getpage=html/index.html&var:menu=maintenance&var:page=system


SMC NETWORKS  
 Setup | Advanced | Management | Status | Help  
**Management**  
 System Management | Firmware Update | Access Controls | Diagnosis | Log Configuration | Logout  
**SYSTEM -- REBOOT**  
 Click the button below to reboot the router.  
 Reboot

**SYSTEM -- BACKUP SETTINGS**  
 Back up Router configurations. You may save your router configurations to a file on your PC.  
 Note: Please always save configuration file first before viewing it.  
 Backup Setting

در انتها کلید ترکیبی  + R را نگه می داریم تا پنجره RUN مطابق شکل زیر باز شود.

و در آن IP 172.17.0.9 را ping می کنیم که باید مطابق شکل زیر باشد.

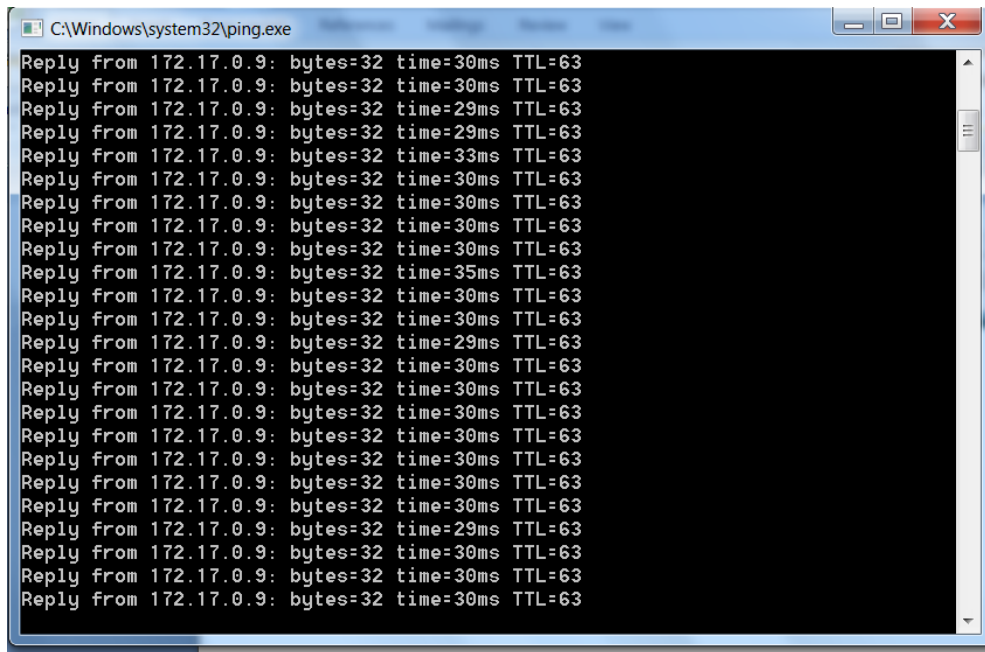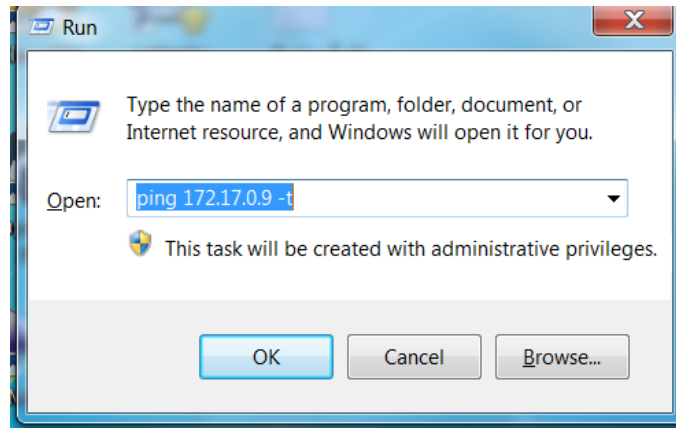

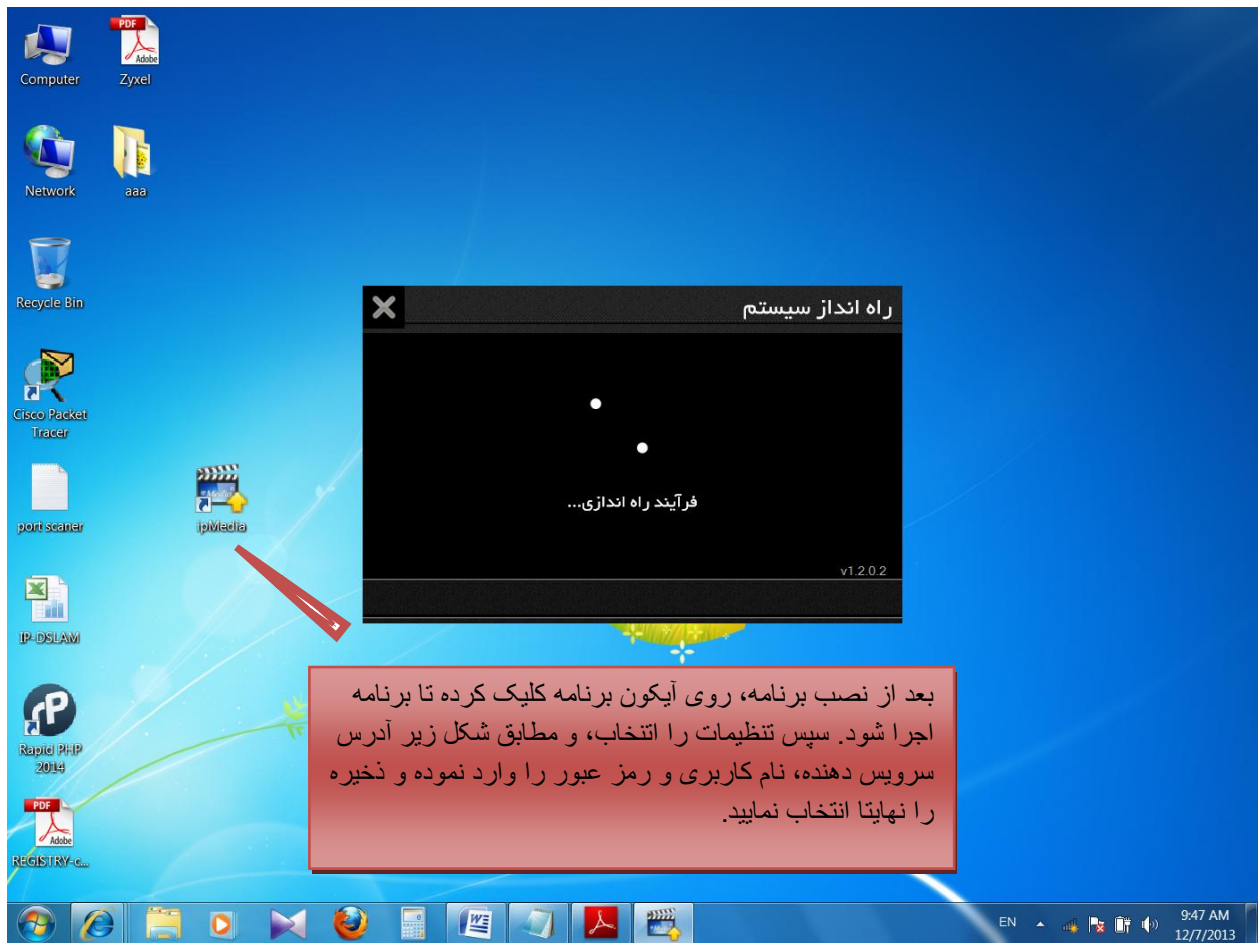

بعد از نصب برنامه، روی آیکون برنامه کلیک کرده تا برنامه اجرا شود. سپس تنظیمات را انتخاب، و مطابق شکل زیر آدرس سرویس دهنده، نام کاربری و رمز عبور را وارد نموده و ذخیره را نهایتاً انتخاب نمایید.

تنظیمات

آخرین بروز رسانی  
20131203094800

آدرس سرویس دهنده  
172.17.0.9

نام کاربری  
281001000 @ghz

رمز عبور  
\*\*\*\*\*

ذخیره بازگشت

راه انداز سیستم

انتخاب زبان

⚠

نادرستی در فرآیند راه اندازی

v1.2.0.2

دوباره (۲۵) تنظیمات